


45° Kegelstutzen mit Überwurfmutter und Rillenstutzen mit Sicherungsbund Milchrohrverschraubung DIN 11851

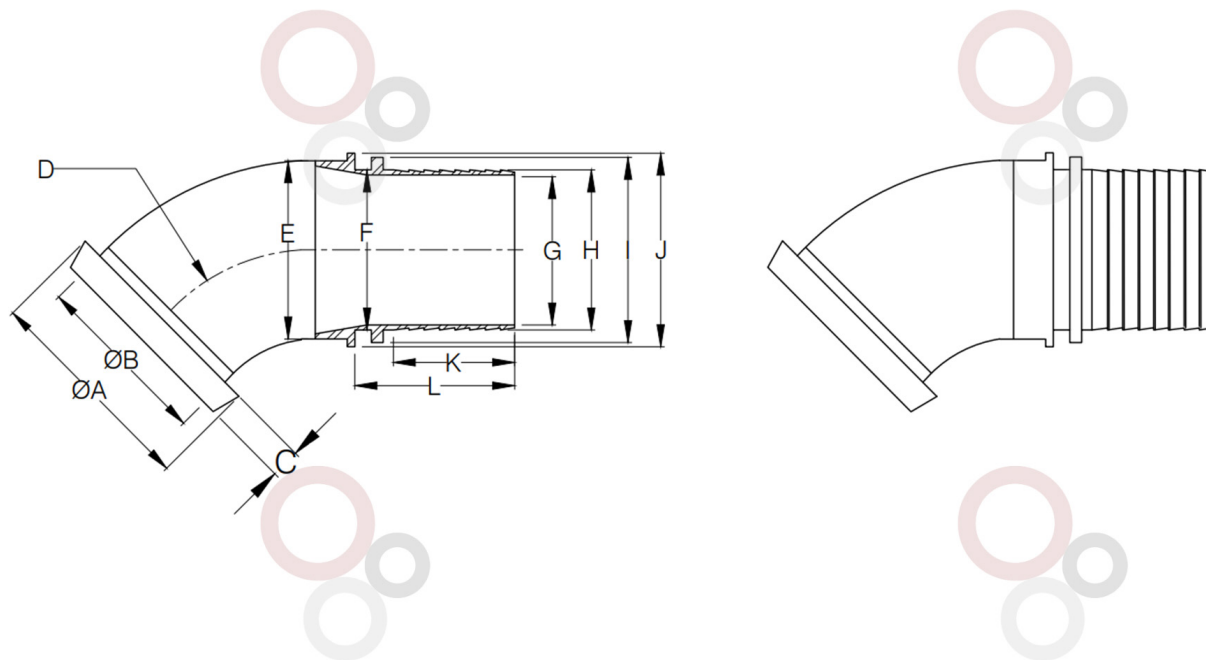

Größe	A	B	C	D	E	F	G	H	I	J	K	L
DN20	36,5	19	13	R40	22	19 +1,0	15 -1,0	19,4 -0,4	26 -1,0	29	30	42
DN25	44	25	15	R50	28	25 +1,0	21 -1,0	25,4 -0,4	32 -1,0	35	30	42
DN32	50	31	15	R55	34	32 +1,0	28 -1,0	32 -0,4	39 -1,0	42	30	42
DN38	56	37	15	R60	40	38 +1,0	33,5 -1,0	38,4 -0,4	45 -1,0	48	30	42
DN40	56	37	15	R60	40	38 +1,0	35,5 -1,0	40,4 -0,4	45 -1,0	48	30	42
DN50	68,5	49	16	R70	52	50 +1,0	45,5 -1,0	50,4 -0,4	58 -1,0	61	35	49
DN65	86	66	17	R80	70	63 +1,0	58,5 +0,5/-1,5	63,4 -0,4	73 -1,0	76	48	63
DN80	100	81	17	R90	85	75 +1,0	70,5 +0,5/-1,5	75,5 -0,4	85 -1,0	91	48	67