
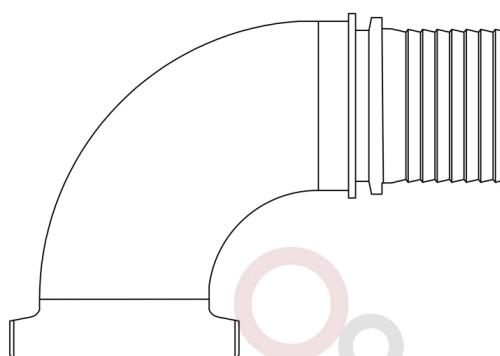


90° Bogen Kegelstutzen gerillt mit Überwurfmutter und Sicherungsbund

Milchrohrverschraubung DIN 11851

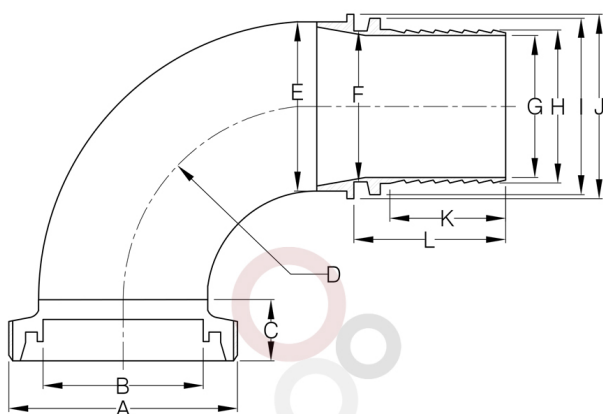

Größe	A	B	C	D	E	F	G	H	I	J	K	L
DN20	RD44x6	19 +0,2	19	R40	22	19 +1,0	15 -1,0	19,4 -0,4	26 -1,0	29	30	42
DN25	RD52x6	25 +0,2	22	R50	28	25 +1,0	21 -1,0	25,4 -0,4	32 -1,0	35	30	42
DN32	RD58x6	31 +0,2	22	R55	34	32 +1,0	28 -1,0	32 -0,4	39 -1,0	42	30	42
DN38	RD65x6	37 +0,2	22	R60	40	38 +1,0	33,5 -1,0	38,4 -0,4	45 -1,0	48	30	42
DN40	RD65x6	37 +0,2	22	R60	40	38 +1,0	35,5 -1,0	40,4 -0,4	45 -1,0	48	30	42
DN50	RD78x6	49 +0,2	23	R70	52	50 +1,0	45,5 -1,0	50,4 -0,4	58 -1,0	61	35	49
DN65	RD95x6	66 +0,2	25	R80	70	63 +1,0	58,5 +0,5/-1,5	63,4 -0,4	73 -1,0	76	48	63
DN80	RD110x4	81 +0,2	26	R90	85	75 +1,0	70,5 +0,5/-1,5	75,4 -0,4	85 -1,0	91	48	67